



IXM TOUCH™

AMAZINGLY STYLISH
AND TOUGH



CAP TOUCH



BATTERY



IP65 RATED



ANDROID® 4.1.2
(Jelly Bean)


CORNING
Gorilla® Glass

Corning®
Gorilla® Glass

INVIXIUM



Scan QR code and
discover more about
IXM TOUCH™

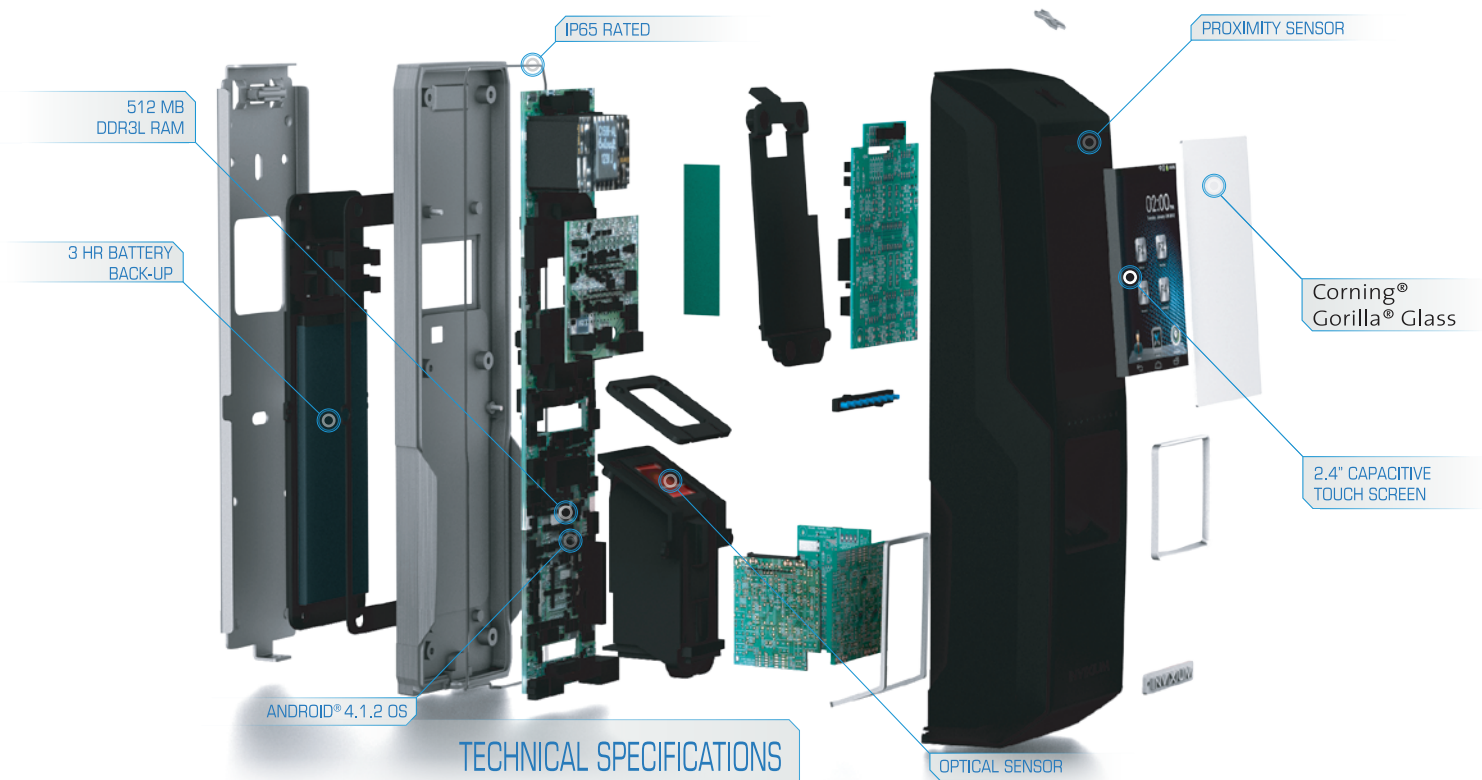


TECHNICAL SPECIFICATIONS

Processor	ARM Cortex A8 - 720 MHz (POWERVR SGX530 3D Graphics Engine)
Random Access Memory	512 MB DDR3L
Flash Memory - NAND	512 MB
Operating System	Android® 4.1.2 (Jelly Bean)
Serial Communication	RS - 232, RS - 485, USB-Aux
Ethernet	100BASE-T
Wi-Fi*	802.11 b/g/n
Wiegand	Customizable up-to 512 bits
USB	USB 2.0 On - The - Go (OTG)
# of GPOs & GPIs	3 & 3
Door Access Controller	1, 000 mA (1-Output, 2-Input, 1-Relay)
Anti-Shock Vandal Protection™	Standard
LCD & Interface	2.4" Capacitive Touch Screen
Auto On™ (Proximity Sensor)	Yes
Audio	Speaker, Microphone
Super Strong Protective Screen Cover	Corning® Gorilla® Glass
Battery Back-up	3 hours
1: N (Users/Records)	5, 000 users or 10,000 biometric records whichever reaches first
1: 1 (Users/Records)*	50, 000 users or 100,000 biometric records whichever reaches first
# of Transaction Logs	500, 000
PoE*	IEEE 802.3af
Voltage & Current	12V - 24V DC (750mA - 500mA)
Operating Temperature	-20° C to +60° C (-4° F to +140° F)
Regulatory Approvals and Certificates	FCC, CE, R&TTE, RoHS, IP65 <small>* only on select models</small>

DEVICE MODELS

Models	Optical Sensor	EM**	HID Prox	iClass SE (HF)***	iClass SE (HF&LF)***	PoE	Wi-Fi
FP1	•	-	-	-	-	-	-
FP1+	•	-	-	-	-	-	•
FP2	•	•	-	-	-	-	-
FP3	•	-	•	-	-	-	-
FP3+	•	-	•	-	-	-	•
FP4	•	-	-	•	-	•	-
FP5	•	-	-	-	•	•	-

DIMENSIONS

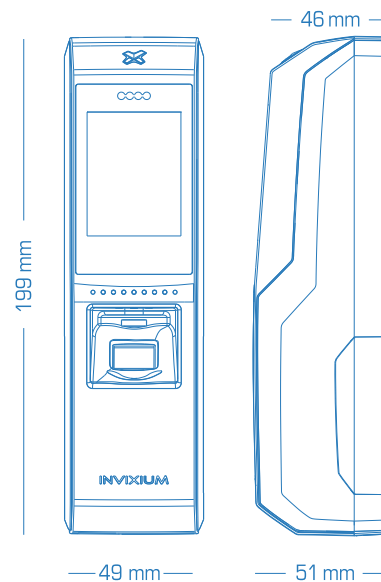

AUTHENTICATION MODES

- Single Factor Authentication
 - Biometric Only, Card Only, PIN Only
- Two Factor Authentication
 - Card + Biometric, Card + PIN, Biometric + PIN
- Three Factor Authentication
 - Card + Biometric + PIN

*Corning and Gorilla are registered trademarks of Corning Incorporated.

**Android is a trademark of Google Inc.

The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.

*** iClass SE can read MIFARE, DESFire, iClass, Prox

iCLASS **PROX BY** P/N XAD-20B-002-01G