

FaceStation F2

Fusion Multimodal Terminal





Unrivaled Face Recognition Performance Best-in-class Multimodal Device



Contactless Solution for the New Normal



Robust Device Security and Data Encryption



Unrivaled face recognition performance by Fusion Matching

FaceStation F2 boasts exceptional authentication accuracy achieved by the fusion matching of visual and infrared(IR) face recognition.

*False Acceptance Rate(FAR) of 1 in 10 billion.





Suprema's unique algorithm optimizes IR and visual face recognition to produce the industry's best face recognition and anti-spoofing performance

Proven track record of authentication performance regardless of user ethnicity and face changes powered by deep learning algorithm

Best-in-class multimodal with various credentials

FaceStation F2 offers a wide range of authentication options including face, mobile access, fingerprint and cards.



ce



Mobile A



Fingerprint

(

• Register up to 100,000 users for fingerprints authentication and 50,000 users for face authentication

 \cdot Supports dual frequency access cards, NFC and BLE-based Mobile Access Cards

 \cdot Access-on-card allows authentication via biometric data stored in cards



Contactless solution for new standards of safety and hygiene

FaceStation F2 meets the needs of the post-pandemic world with remote and contactless solution.

- · Detects and limits access of users not wearing masks
- · Face recognition of users wearing masks
- · Remote user enrollment through profile photo uploads
- · Combines with Suprema Thermal Camera to identify users with elevated skin temperature

Robust device security and data encryption


FaceStation F2 is equipped with security measures to protect user data.

 \cdot Highest level of device security including secure booting process

· Encrypts all biometric credentials and personal information

· Built on Android and all its security enhancements



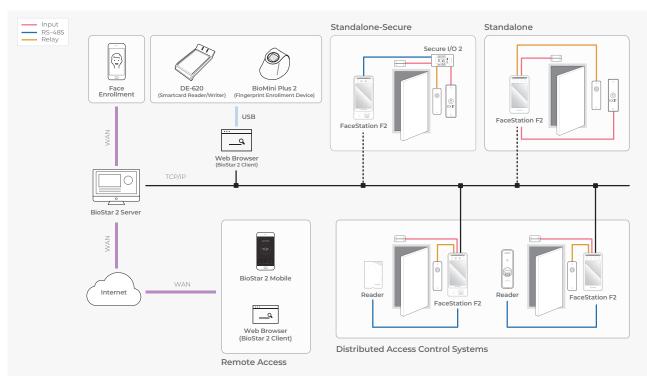

System Configurations

Product Specification -





Category	Feature		FSF2-DB	FSF2-AB	FSF2-ODB
Credential	Biometric		Face		Face, Fingerprint
	RF Option		125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2, FeliCa	125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EVI/EV2, FeliCa, iCLASS SE/SR/Seos	125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2, FeliC
	RF Read Range*		EM/MIFARE/DESFire : 50 mm (2"), FeliCa: 30 mm (1.2") * RF read range will vary depending on the installation environment		
	Mobile		NFC, BLE		
General	CPU		1.8 GHz Dual Core + 1.4 GHz Quad Core		
	Memory		16GB Flash + 2GB RAM		
	LCD Type		7" IPS color LCD		
	LCD Resolution		800 x 1280 pixels		
	Sound		16bit		
	Operating Temperature		-20°C ~ 50°C (-68°F ~ 122°F)		
	Operating Humidity		0% ~ 80%, non-condensing		
	Dimension (W x H x D)		119.8mm x 223mm x 23.5mm (4.7" x 8.8" x 0.9")		119.8mm x 268.4mm x 49.7mm (4.7" x 10.6" x 1.9")
		Device	585g		670g
	Weight	Bracket	1	81g	205g
	(Including washer and bolt)			IP65	
	Certificates		CE, FCC, KC, RoHS, REACH, WEEE		
Face			0.5m ~ 1.3m (19.7" ~ 51.2")		
	Recognition Distance		0.5m (1.5m (19.7 ~ 51.2) 140cm ~ 190cm (55.1" ~ 74.8")		
	Recognition Height		Less than 0.5 sec		
	Matching Speed Live Face Detection				
	(Anti-Spoofing)		Supported		
Fingerprint	Image Dimension				300 x 400 pixels
	Resolution		N/A		500 dpi
	Template				SUPREMA / ISO19794-2, ANSI-378
	Extractor / Matcher				MINEX certified and compliant
	Sensor Certificates				FBI PIV and FBI Mobile ID FAP20
	Live Fingerprint Detection				Supported (SW-based)
Capacity	Max. User (1:1) * Based on one face/fingerprint enrollment per user		100,000		
	Max. User (1:N) * Based on one face/fingerprint enrollment per user		Face:	50,000	Face: 50,000 Fingerprint: 100,000
	Max. Text Log		5,000,000		
	Max. Image Log		50,000		
Interface	Ethernet		10/100 Mbps, auto MDI/MDIX		
	RS-485		1ch Host or Slave (Selectable)		
	Wiegand		lch Input, lch Output		
	TTL Input		2ch Inputs		
	Relay		1 Relay		
	USB		USB 2.0 (Host)		
	Tamper		Supported		
Power			Voltage: DC 12V ~ DC 24V Current: Max 2.5 A * Use a 24V/2.5A adapter. Must follow the product manual when using a 12V adapter.		

Suprema Inc.

17F Parkview Tower, 248, Jeongjail-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13554, Republic of Korea T +82 31 783 4502 E sales_sys@supremainc.com www.supremainc.com



 For more information about Suprema's global branch offices,

 visit the webpage below by scanning the QR code.

 https://www.supremainc.com/en/about/contact-us.asp

©2020 Suprema, Inc. Suprema and identifying product names and numbers herein are registered trade marks of Suprema Inc. All non-Suprema brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice. [SUPREMA-AHL-FSF2-EN-REV01]